


PNÖMATİK DÖNMEZ MİLLİ SİLİNDİR

PNEUMATIC NON ROTATE CYLINDER

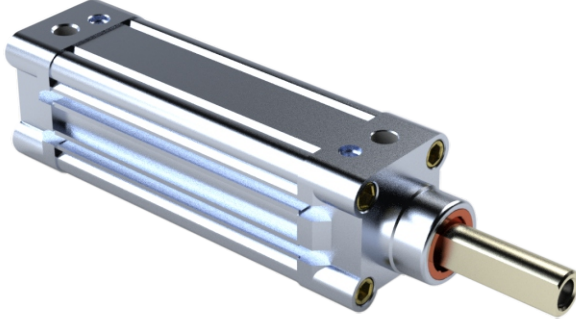

Sipariş Kodu / Ordering Code

RIC_N 50 50 S

Manyetik / Magnet

Strok / Stroke (mm)

Çap / Bore Size (mm)

Model / Model

Model / Model Type

Ürün Model Kodu / Product Model Code

Çap / Bore (mm)

50 - 63 - 80 - 100 mm

Strok / Stroke (mm)

5 mm - 1400 mm

Manyetik / Magnet

S: Manyetik / Magnet

Bore (mm)	A	A1	A2	B	C	D	E	F	G	H	I	J	K	L
50	175	244	233	27	106	40	42	10	32	32	23	8	M14 x 1.5	M8
63	190	258	247	26	122	45	42	10	36	32	23	8	M14 x 1.5	M8
80	214	301	288	35	127	45	52	10	37	40	26	10	M14 x 1.5	M10
100	229	321	308	40	137	55	52	10	39	40	26	10	M14 x 1.5	M10

Bore (mm)	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Z1
50	12	21	G1/4	7	3	9	65	46.5	20	17	38	4	65.8	84.5	23
63	12	23	G3/8	8	5	9	76	56.5	20	17	40	4	79.9	99.6	23
80	15	24	G3/8	10	5	12	94	72	20	22	43	5	101.8	123.8	29
100	15	26	G1/2	10	5	14	112	89	20	22	47	6	125.9	148.9	29

Çap / Bore	50	63	80	100
Akışkan / Fluid	Hava / Air			
Çalışma Basınç Aralığı / Working Pressure Range	1 ~ 9,0 kgf/cm²			
Maximum Basınç Dayanımı / Max. Pressure Resistance	13,5 kgf/cm²			
Çalışma Sıcaklık Aralığı / Working Temperature Range	0 ~ 70 °C			
Çalışma Hız Aralığı / Working Speed Range	50 ~ 800 mm/sec			
Kuvvet / Force kg (at 6 bar)	117.7	186.9	301.4	471

