


SHORT STROK AYARLI SİLİNDİR

PNEUMATIC ADJUSTABLE STROKE CYLINDER

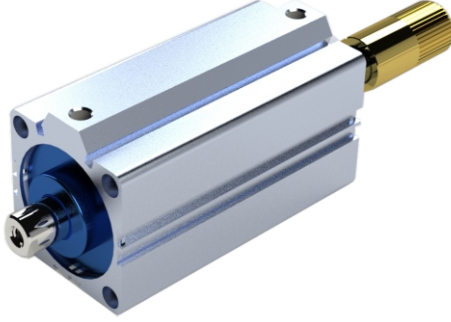

Sipariş Kodu / Ordering Code

SDAQ 50 50 S M

Manyetik / Magnet

Strok / Stroke (mm)

Çap / Bore Size (mm)

Model / Model

Model / Model Type

Ürün Model Kodu / Product Model Code

Çap / Bore (mm)

32 - 40 - 50 - 63 - 80 - 100 mm

Strok / Stroke (mm)

10 mm - 100 mm

Manyetik / Magnet

S: Manyetik / Magnet

Diş / Thread

M: Erkek Dişli / Male Thread
F: Dişi Dişli / Female Thread

Çap Bore	D	K1	O	P3	P4	S	T1	V	P1
32	49.5	M8 x 1.25	G1/8	17	7	45	34	16	Q9 M6 x 1.0
40	57	M8 x 1.25	G1/8	17	7	53	40	16	Q9 M6 x 1.0
50	71	M10 x 1.5	G1/4	22	8	64	50	20	Q11 M8 x 1.25
63	84	M10 x 1.5	G1/4	28.5	10.5	77	60	20	Q14 M10 x 1.5
80	104	M16 x 2.0	G3/8	35.5	13.5	98	77	25	Q17.5 M12 x 1.75
100	123.5	M20 x 2.5	G3/8	35.5	13.5	117	94	32	Q17.5 M12 x 1.75

Çap Bore	Standard Type			Attach Magnet			B1	E	N	Q	J1	K3	B2	H	J	K2	M	R	V	W
32	79.5	95.5	45.5	89.5	105.5	55.5	17	13	12.5	28	7	M12 x 1.25	38.5	23.5	8	M14 x 1.5	6	22	16	14
40	89	105	55	99	115	65	17	13	14	28	7	M12 x 1.25	38.5	23.5	8	M14 x 1.5	6	28	16	14
50	91.5	107.5	55.5	101.5	117.5	65.5	18	15	14	29	8	M16 x 1.5	43.5	28.5	11	M18 x 1.5	6.5	35	20	17
63	93	109	57	103	119	67	18	15	16.5	29	8	M16 x 1.5	43.5	28.5	11	M18 x 1.5	6.5	35	20	17
80	106	126.5	66	116	136.5	76	20	21	19	35.5	10	M20 x 1.5	53.5	35.5	13	M22 x 1.5	8.5	43	25	22
100	119.5	145	75.5	129.5	155	85.5	22	27	23	42.5	13.5	M27 x 2.0	53.5	35.5	13	M26 x 1.5	10	59	32	27

